

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 36 TOWNSHIP 16 RANGE 4

DATE: 1-11-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 9-16-98

IN. S.P.C. E ZONE NAD '83

NAME: 16043604

N: 504170.5640(m)

E: 67563.0640(m)

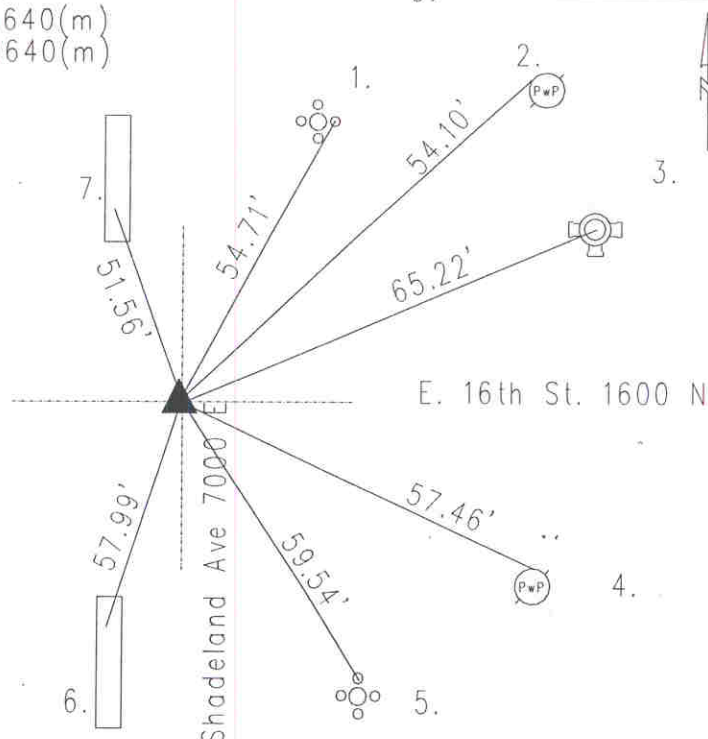

Original post set 1820 by Hendricks with witness 36" beech N 41 E 34 links;
15" dogwood S 63 W 39 links per Marion County Atlas pg. 11. Hosbrook 5-24-1850
called no stone but witness: 26" beech N 88 W 58 1/3 links ' 10" sugar S 80
E 55 1/2 links per Marion County Atlas pg. 8. Woener 6-18-48 called brass pin.
Monroe 7-13-51 called same. Wilcoxon 3-4-76 called same. Gries 11-30-87
called same. Wilcoxon 9-17-95 called PK nail with washer over brass plug
4" down. Excavated by Wilcoxon 9-16-98 and brass plug found 4" down.
Harrison set. Re-tied 1-11-04.
16043604

REF.	DISTANCE	DESCRIPTION
1.	54.71'	Cut 'x' E-bolt of aluminum pole base
2.	54.10'	PK nail NW PwP#270-478 B 3"up
3.	65.22'	Top nut of fire hydrant
4.	57.46'	Mag nail w/brass washer NE PwP#234-518 6"up
5.	59.54'	Cut 'x' N-bolt of aluminum pole base
6.	57.99'	Cut 'x' N-end of median
7.	51.56'	Cut 'x' S-end median